


Orbisint CPS11D

Memosens Glass Electrode For Standard Applications

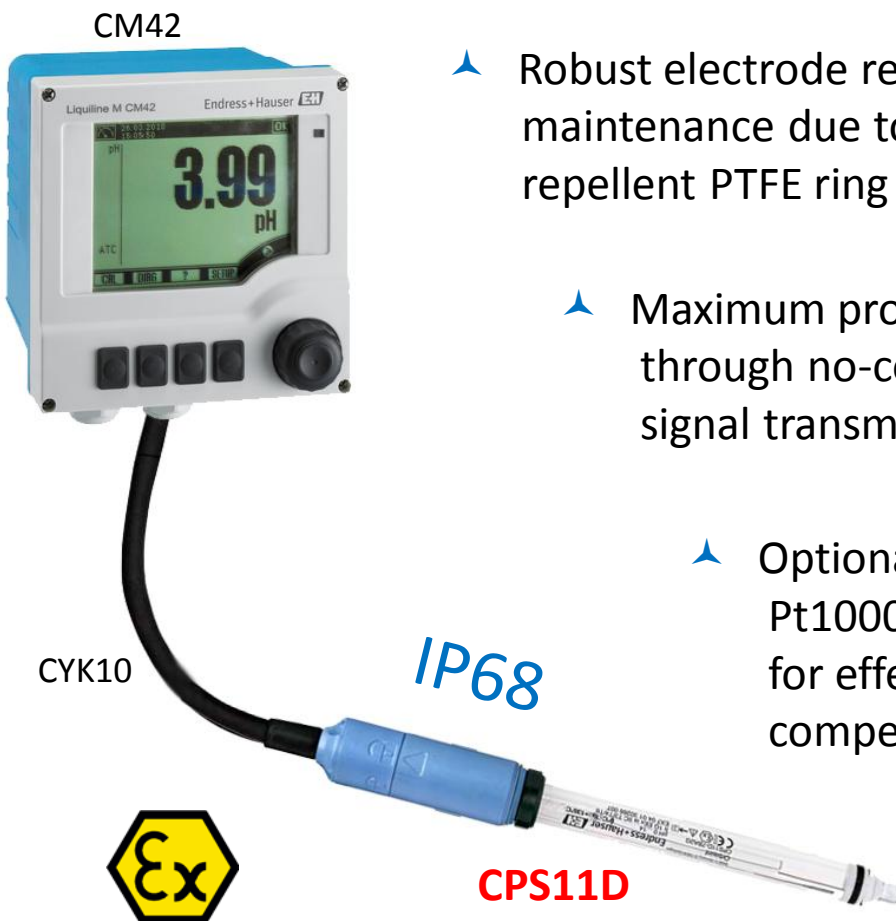

- ▶ Robust electrode requiring low maintenance due to large, dirt repellent PTFE ring diaphragm
- ▶ Maximum process safety through no-contact inductive signal transmission
- ▶ Optional: Built in Pt100 or Pt1000 temperature sensor for effective temperature compensation

Measurement range:	pH 0-14
Process temperature:	max. 135°C (274°F)
Process pressure:	max. 16 bar (230 psi)
System Component:	Transmitter CM42 and cable CYK10