


Turbimax CUS51D

Suspended Solids And Turbidity Sensor

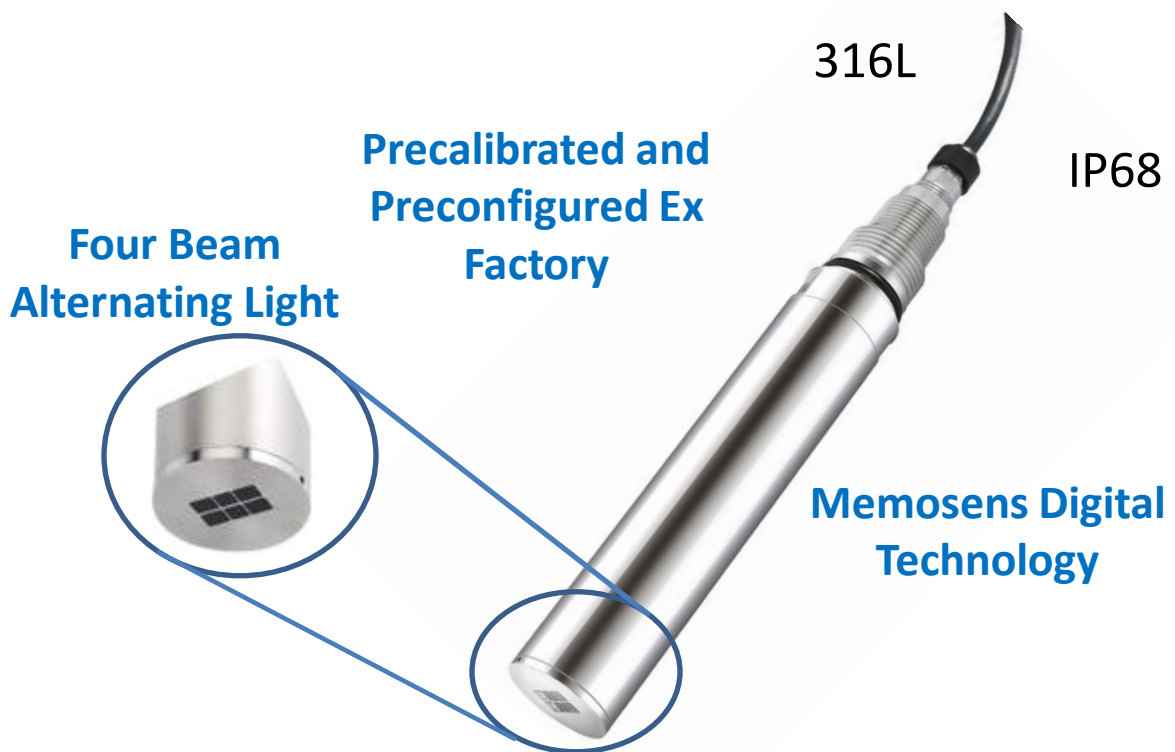

- ◆ Intelligent: All calibration and sensor-specific data are stored in the sensor.
- ◆ Measurement range: 0..9999 FNU, 0..150g/l SS
- ◆ Measuring principle: Scattered light in 90°/135°
- ◆ Process temperature: -50 ... 50°C
- ◆ Ambient temperature: -20 ... 60°C