



Level



Pressure



Flow



Temperature



Liquid Analysis



Registration



Systems Components



Services



Solutions


S111

Frequency to DC Isolator - Converter

◆ Power supply:
115 / 230 Vac, 24 Vdc-ac

◆ Output selectable via DIP-switches:
- Current 0..20 / 4..20 mA;
- Voltage 0..5 / 1..5 Vdc

◆ Input: Free contact, reed, NPN 2/3 wire, PNP at 24 Vdc, NAMUR sensor, 24 Vdc pulse, photoelectric sensor

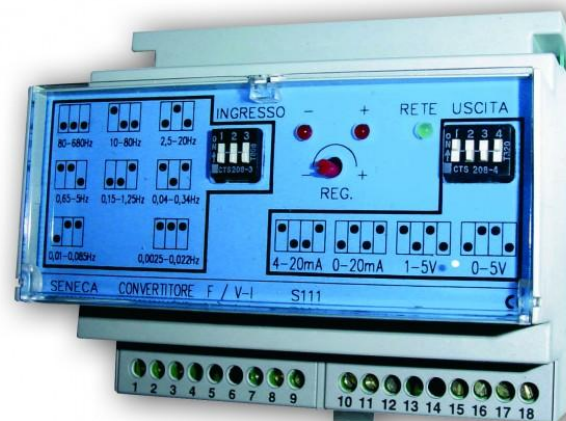

Input frequency:

From 1 pulse every 27' at 680 Hz

Isolation:
4.500 Vac (power/ input/output)